
## BEST AVAILABLE COPY









The Patent Office Concept House Cardiff Road Newport South Wales NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

17 January 2005

ents Form 1/77

Patents Act 1977 (Rule 16)



170EC03 E860027-1 C69640

The Patent Office

Cardiff Road Newport South Wales NP10 8QQ

Request for grant of a patent (See the notes on the back of this form You can also

an explanatory leaflet from the Patent Office to help you fill in this form)

Your reference

IB/jag/FBDC4

Patent application number (The Patent Office will fill this part in)

0329187.9

117 DEC 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Susan Nicola Pieterse c/o Food Business Development Consultancy 68 Park Street

St Albans Herts (GB) AL2 2PW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8450975001

Title of the invention

A BREATHABLE PACK

Name of your agent (if you bave one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

i.p. 21 Limited Norwich Research Park Colney **NORWICH** NR4 7UT United Kingdom (GB)

Patents ADP number (if you know it)

8143653001

Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months. Country

Priority application number (if you know it)

Date of filing (day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f) Number of earlier UK application

Date of filing (day / month / year)

Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

NO

a) any applicant named in part 3 is not an inventor, or there is an inventor who is not named as an applicant, or

 any named applicant is a corporate body. Otherwise answer NO (See note d)

Patents Form 1/77

#### Patents Form 1/77

 Accompanying documents: A patent application must include a description of the invention.
 Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form 0

Description 6

Claim(s) 1

Abstract 0

Drawing(s)  $3 + 7 \times 10^{-10}$ 

If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination
(Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom ianhigh.

IPLI Combidly IBDate

01603 457008

ianbishop@ip21.co.uk

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

- 1 -

10

## A PACK

## Field of the Invention

15

The present invention relates to packs suitable for housing liquid and/or solid-liquid contents. The invention relates particularly to packs which are destined to operate in ovens utilising a combination of microwave, conventional heat and forced air technology for rapidly cooking the food products for the convenience of the customer.

20

30

## Background to the Invention

In the field of packs which operate in combination ovens using microwave and conventional heat, the range of suitable materials to withstand high temperatures typically in excess of 240° whilst not being hazardous to microwaves is limited. For example, aluminium foil containers such as those commonly employed in drink cartons are not suitable for microwave usage and will also not withstand other high temperatures.

Furthermore, conventional plastic packaging which are now widely used as microwavable packs are not suitable for combination oven operation.

One of the objectives of the invention is to provide a pack which has an inner surface sufficiently permeable to prevent the pack's contents from leaking through the wall's of

the pack. This would be particularly detrimental in the eyes of the customer handling the pack and may even be hazardous to the customer bearing in mind the high temperature of cooking used in this technology.

A further objective of the invention is to provide a pack which is sufficiently rigid to contain the food elements or other contents without readily collapsing on itself, thus allowing the pack to be handled without undue difficulty by the customer.

A further objective of the invention is to provide a pack that does not unduly change its appearance despite being submitted to elevated temperatures. Another objective of the invention is to present a pack which incorporates the usual layers of ink which survive, almost without modification, the arduous cooking process.

## Summary of the Invention

15

10

In a first broad independent aspect, the invention provides a pack suitable for housing liquid and/or solid-liquid contents whose wall comprises a layer of board, an inner layer sufficiently impermeable to create a seal between the board and the pack's contents, and an outer protective layer covering the board, wherein the pack's layers are microwavable and the outer layer is breathable.

By 'breathable' we mean sufficiently porous that, if the pack is microwaved, the outer layer can absorb the resultant rise in temperature within the layer without blistering, bubbling or otherwise unduly disfiguring.

25

30

20

This combination of features is particularly advantageous because it allows combination oven cooking with microwave and conventional heat in excess of 240°C. It is also particularly advantageous because the pack in these conditions will be able to retain its configuration, particularly in terms of colour, structure and surface smoothness. The pack will also be particularly advantageous because it simultaneously retains its impermeable aspect so that it will tend to protect the customer from leaks through the pack's wall which could be an important commercial deterrent to would-be purchasers but may also be hazardous to use.

In a subsidiary aspect in accordance with the invention's first broad aspect, the outer layer is a varnish and a further layer is provided between the varnish layer and the board which is of ink and which is breathable. This configuration will be beneficial because it will have the effect of essentially preventing the disfiguration of the printed portions which are those portions which usually primarily catch the eye of customers.

5

10

15

20

25

30

In a further subsidiary aspect, the breathable region is substantially limited to the ink layer area. Whilst it is believed that a certain degree of disfiguration may be tolerable in certain areas of the pack, disfiguration of the printed region would be particularly detrimental and therefore only rendering the ink layer area breathable would achieve an improved level of pack appearance without increasing the cost of rendering the entire outer pack layer breathable.

In a further subsidiary aspect, the breathable region comprises perforations spaced within the range of 5mm to 40mm. Within this range the perforations almost entirely prevent undue disfiguration of the pack. Whilst above that range noticeable disfiguration occurs.

In a further subsidiary aspect, the pitch of perforations is substantially 20mm. At these levels, no noticeable disfiguration occurs when the packs are used in combination ovens.

In a further subsidiary aspect, the perforations are strips. Conventional forms of scoring apply circular pores onto a layer. Applying strips achieves a similar effect to circular pores and maybe preferable for certain types of designs.

In a further subsidiary aspect, the outer layer is formed by strands of appropriate material with gaps formed between the strands acting as breathable regions. Traditionally, the outer layer is applied to cover the entire outer pack surface and perforations may then be applied by scoring the outer surface. In this instance, the outer layer is formed by strands with gaps formed between the strands acting as breathable regions so that a single step of applying the outer layer is required rather than the traditional two step process of covering the outer surface of the pack and then perforating the outer surface.

In a second broad independent aspect, the invention provides a sheet comprising a layer of board covered by an impermeable layer on one side and a protective layer on the other side covering the board, wherein the layers are microwavable and said protective layer incorporates a breathable region or regions. This configuration is particularly advantageous because it provides a sheet which may be folded into a pack having the advantages as outlined with reference to the first broad inventive aspect. It may also be used in other forms in combination cooking where its advantages of not unduly disfiguring at high temperatures and in microwave situations would come to light.

## 10 Brief Description of the Figures

Figure 1 shows a cross-sectional view of a portion of the wall of a pack or sheet in accordance with a first embodiment.

Figure 2 shows a cross-sectional view of a portion of a pack's wall or sheet according to a second embodiment of the invention.

Figure 3 shows a cross-sectional view of a pack's wall or sheet in accordance with a third embodiment of the invention.

Figure 4 shows a further cross-sectional view of a pack's wall or sheet in a fourth embodiment of the invention.

Figure 5 shows a schematic perspective view of a board surface in accordance with a fifth embodiment of the invention.

Figure 6 shows a close-up plan view of a region of a pack's wall or sheet in accordance with a sixth embodiment of the invention.

#### 30 Detailed Description of the Figures

20

Figure 1 shows a portion generally referenced 1 of a pack's wall or sheet comprising an inner impermeable layer 2. The inner impermeable layer 2 may be of PET (polyethylene

perephthalate) or any other material suitable for creating an impermeable layer whilst being microwavable and heatable to a temperature of say 270°C. The structural strength of the pack will mainly be provided by the board layer 3 which may be of cardboard or any other appropriate board microwavable and heatable to temperatures in excess of 260°C as selected by the person skilled in the art.

· 5

10

20

30

On the outside of the board a layer of ink referenced 4 may be applied to mark the board with its trade mark or any other advertisement material. In order to prevent the disfiguration of the board a protective varnish layer 5 is applied. The varnish will be selected by the person skilled in the art to be suitable for heating at temperatures in excess of 260°C and microwavable. The protective layer 5 comprises a number of perforations such as those referenced 6, 7, 8, 9 and 10.

These perforations may be formed by a screening process or any other appropriate manufacturing technique as selected by the person skilled in the art. The perforations illustrated perforate only the varnish layer.

Figure 2 shows a further portion generally referenced 11 of a pack's wall or sheet. Similar components to portion 1 have been referenced by identical numerical references. The perforations 6, 7, 8 and 9 traverse both the ink layer 4 and the varnish layer 5. In this instance, layer 4 and layer 5 form the breathable region of the pack which will limit any blistering, bubbling or undue disfiguration of the pack. These perforations may be set at 20mm from one another in order to ideally achieve this effect.

Figure 3 shows a further portion generally referenced 12 where identical components have retained identical numerical references. In this embodiment the perforations 6, 7, 8, 9 and 10 traverse layers 5 and 4 and partly extend into the board layer 3.

Figure 4 shows a further pack wall or sheet portion generally referenced 13 where identical components have retained identical numerical references. In this instance the ink layer covers only a portion of the board and it is at this portion that perforations 6 and 7 are present and extend through a varnish layer 5, an ink layer 4 and partly through board layer 3.

Figure 5 shows a portion 14 of a pack's wall or sheet with a varnish layer 15 applied on the top surface. Strips such as those referenced 16 and 17 are applied to the pack to achieve a breathable region in order to avoid undue disfiguration of the pack particularly in combined oven applications. The strips of the kind of strip 16 alternate with strips of the kind of strip 17 so as to achieve a compromise between structural strength of the pack and breathability.

Figure 6 shows a close-up view of the region of a pack's wall or a sheet. The outer protective layer is formed of strands of appropriate material such as those referenced 19 and 20 which leave gaps such as that referenced 21 to achieve breathability.

The strands' material may be selected from known alternatives by the person skilled in the art.

15

. 5

The orientation of the strands may be selected by the person skilled in the art to contribute to the structural strength of the pack if appropriate.

٠.

20

### CLAIMS

5

10

- 1. A pack suitable for housing liquid and/or solid-liquid contents whose wall comprises a layer of board, an inner layer sufficiently impermeable to create a seal between the board and the pack's contents, and an outer protective layer covering the board, wherein the pack's layers are microwavable and the outer layer is breathable.
- 2. A pack according to claim 1, wherein the outer layer is a varnish and a further layer is provided between the varnish layer and the board which is of ink and which is breathable.
- 3. A pack according to claim 2 wherein the breathable region is substantially limited to the ink layer area.
- 4. A pack according to any preceding claim wherein the breathable region comprises perforations spaced within the range of 5mm to 40mm.
  - 5. A pack according to claim 4 wherein the pitch of perforations is substantially 20mm.
  - 6. A pack according to either of claims 4 and 5 wherein the perforations are strips.
  - 7. A pack according to any preceding claim wherein the outer layer is formed by strands of appropriate material with gaps formed between the strands acting as breathable regions.
- 8. A sheet comprising a layer of board covered by an impermeable layer on one side and a protective layer on the other side covering the board, wherein the layers are microwavable and said protective layer incorporates a breathable region or regions.
  - 9. A pack substantially as herein before described with reference to and/or illustrated in any appropriate combination of the accompanying text and/or figures.

20

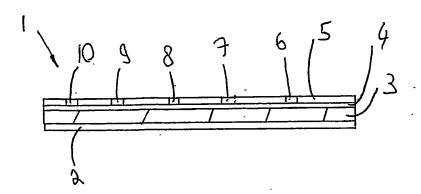
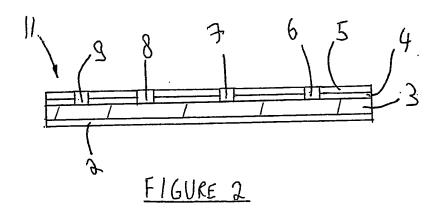
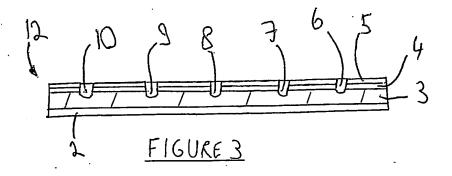
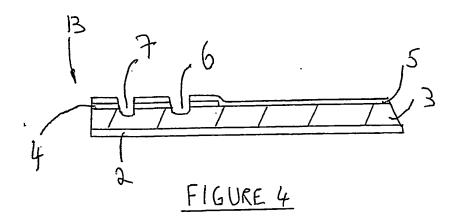


FIGURE 1







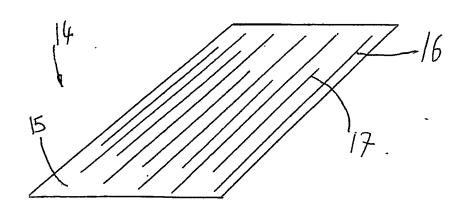


FIGURE 5

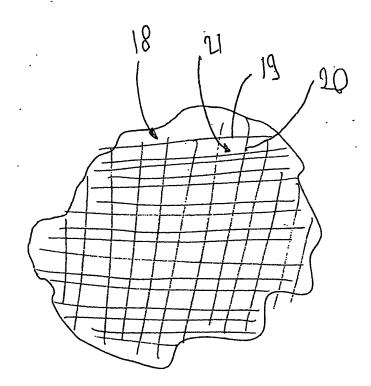


FIGURE 6

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/005231

International filing date:

17 December 2004 (17.12.2004)

Document type:

Certified copy of priority document

Document details:

Country/Office: GB

Number:

0329187.9

Filing date:

17 December 2003 (17.12.2003)

Date of receipt at the International Bureau: 24 January 2005 (24.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in

compliance with Rule 17.1(a) or (b)



## This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
OTHER:

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.